


LCD Pinout and Backlight Information



Note:

1. Back view for Solomon LCD Type A.
2. Backlight must be current limited to less than 200ma.
For 5 volt operation, use 10 ohm series resistor.
3. Pin15 + LCD power.
Pin 16 - LCD power.

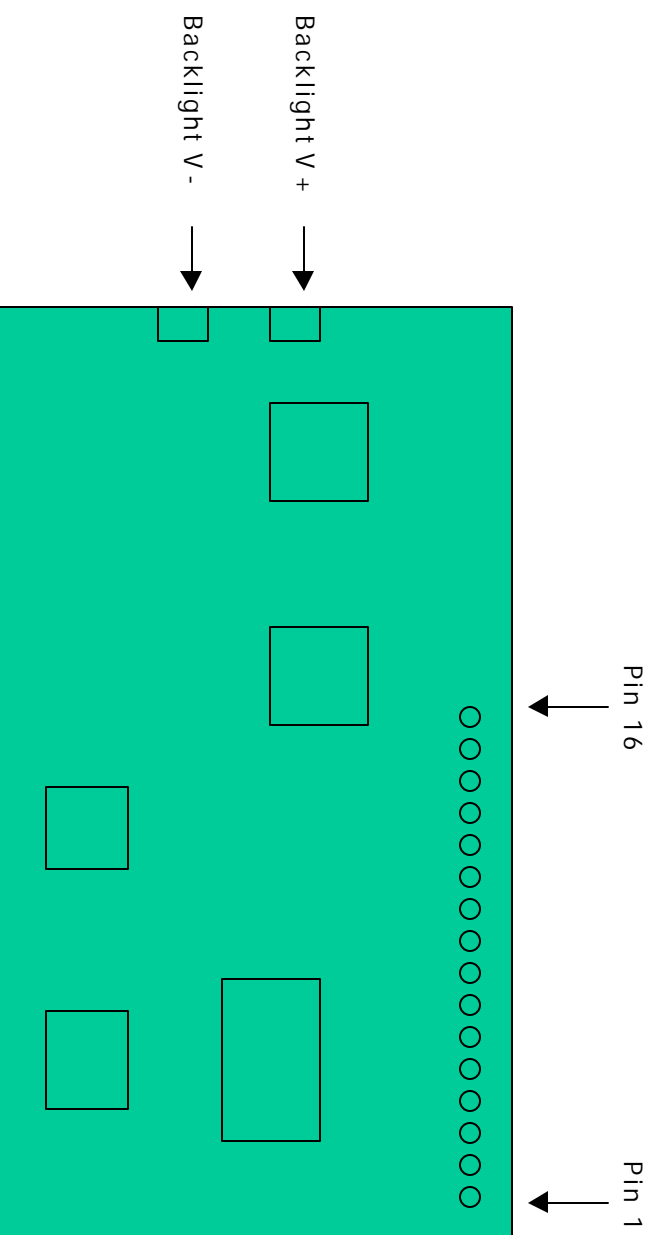

SOLOMON Group

Interface

[[Home](#)] [[Up](#)] [[Contact SOLOMON LCM](#)] [[Distribution Net](#)] [[NEWS](#)]

INTERFACE

[About us](#) TYPE A

Production	PIN NO	1	2	3	4	5	6	7	8
	SYMBOL	VSS	VDD	VO	RS	R/W	E	DB0	DB1
Products	PIN NO	9	10	11	12	13	14	15	16
	SYMBOL	DB2	DB3	DB4	DB5	DB6	DB7	LED POWER	LED POWER
Modules									

NOTE: PIN 15, PIN 16 IS LED POWER SUPPLY
 CUSTOMER CAN SELECE PIN 15(+), PIN 16(-) OR PIN 15(-), PIN 16(+)

VDD/VSS	J1,K1
15K/T6A	JK
15A/T6K	JA

[[Home](#)] [[Up](#)]